


TX Series Rotary Tillers

Standard features include:


- The tillers are available with either chain drive or gear drive
- 6 Blades per flange
- Series 50 PTO drive shaft with Slip Clutch
- Single piece structure Top Hitch and Double Torque Tube
- Heavy Duty zinc plated Jack Stand
- Lower Links adjustable
- Reverse Till is available
- Powder coating finishing



2207 Vista Chaparral
 Carlsbad, CA 92009, USA
 Tel: 001 760 6210018
 Fax: 001 760 4544549
 bill.yuan@autotechgear.com

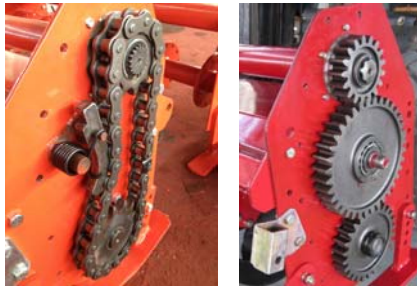

Heavy Duty 16A Side Chain Drive or Gear Drive

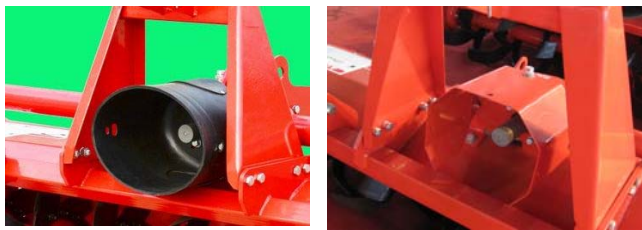

Standard Gearbox Shield or Metal Shield Option



Packing



PTO shaft with Slip Clutch

Model	Tilling Width	Working Depth	No. Of Tines	No. of Rotor Flanges	Weight w/PTO (LBS)	Horse Power Required	Side Drive	PTO Shaft	PTO Protection	Hitch Cat.
TXC-32 	30"	6 1/8"	18	3	277	15-30 HP	#80 (16A)Chain	#40-750E	Slip Clutch	Cat.I
TXC-40	39"	6 1/8"	24	4	315	15-30 HP	#80 (16A)Chain	#40-750E	Slip Clutch	Cat.I
TXC-50	48"	6 1/8"	30	5	352	15-30 HP	#80 (16A)Chain	#40-750E	Slip Clutch	Cat.I
TXC-59	57"	6 1/8"	36	6	389	15-30 HP	#80 (16A)Chain	#40-750E	Slip Clutch	Cat.I
TXG-32 	30"	6 1/8"	18	3	297	15-30 HP	Gear Drive	#40-750E	Slip Clutch	Cat.I
TXG-40	39"	6 1/8"	24	4	334	15-30 HP	Gear Drive	#40-750E	Slip Clutch	Cat.I
TXG-50	48"	6 1/8"	30	5	372	15-30 HP	Gear Drive	#40-750E	Slip Clutch	Cat.I
TXG-59	57"	6 1/8"	36	6	409	15-30 HP	Gear Drive	#40-750E	Slip Clutch	Cat.I