


BX Series Rotary Tillers

Standard features include:

- 50 to 130 HP
- MULTISPEED GEARBOX
- Series 80 PTO drive shaft with Slip Clutch
- Single piece structure Top Hitch
- Lower Links adjustable
- Powder coating finishing
- Multispeed Gearbox 540 rpm PTO
- Side gear drive in oil bath
- Universal three point hitch, cat. II[^]
- Bonnet spring adjusters
- Pair of skids
- Waterproof sealings, oil bath lubrication
- «CE» safety guards



2207 Vista Chaparral
 Carlsbad, CA 92009, USA
 Tel: 001 760 6210018
 Fax: 001 760 4544549
 bill.yuan@autotechgear.com

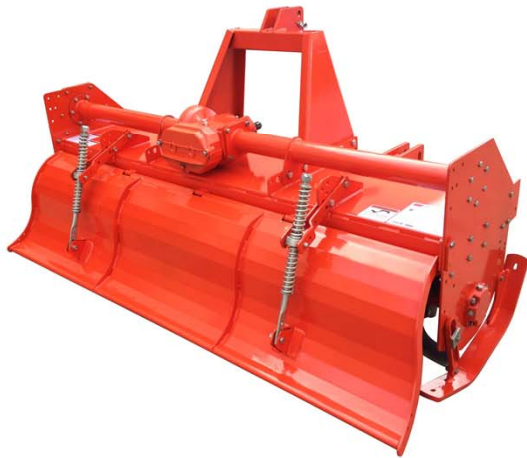

Model	MPN	Tilling Width (mm)	Total Width (mm)	Number of Tines	Tractor (HP)	Weight w/o PTO (Kgs)	PTO Shaft	Packing Crate (mm)	QTY/40HQ Container	Transmission
TB200		1940	2170	48	50-100	632	540	2250x980x850		
TB220		2175	2405	54	60-100	663	540	2500x980x850		
TB240		2410	2640	60	70-100	707	540	2750x980x850		
TC260		2530	2830	66	80-130	873	540	2930x980x850		
TC280		2765	3065	72	90-130	915	540	3165x980x850		
TC300		3000	3300	78	100-130	957	540	3400x980x850		